

## Profile Rail Brake

**Fits 15, 20, 30, 25, 35, and 45 mm Profile Guide Rails**


Nexen's RB Series of linear profile guide rail brakes uses spring force to secure the load in holding applications. Superior response time and high force for stopping and holding in e-stop and power-off situations. Each RB brake clamps directly onto the center of the guide rail to provide positive braking and holding in all axes. These profile rail brakes hold position accurately by eliminating drive train backlash and elasticity.

Nexen's RB Series is engineered for dependable performance. With a revolutionary set of patent pending features, the RB Series provides an industry leading braking solution for linear profile guide rails. If personnel safety is required, an unrelated, redundant safety system is recommended.



- Highest air released holding force on the market
- Spring engaged, air released for power-off, e-stop and holding applications
- Configurations to fit most profile guide rails  
- (Hiwin, NSK, SKF, IKO, INA, Star, THK)
- Brake geometry is similar to system bearing cassettes for easy installation
- Low backlash for accurate position holding
- Adjustable facing gap for optimum brake performance
- Field servicable friction facing replacement
- Large friction facing contact area
- No lubrication or periodic maintenance required
- Provides stiffness and eliminates vibration in linear drives

## Rail Brake Cutaway

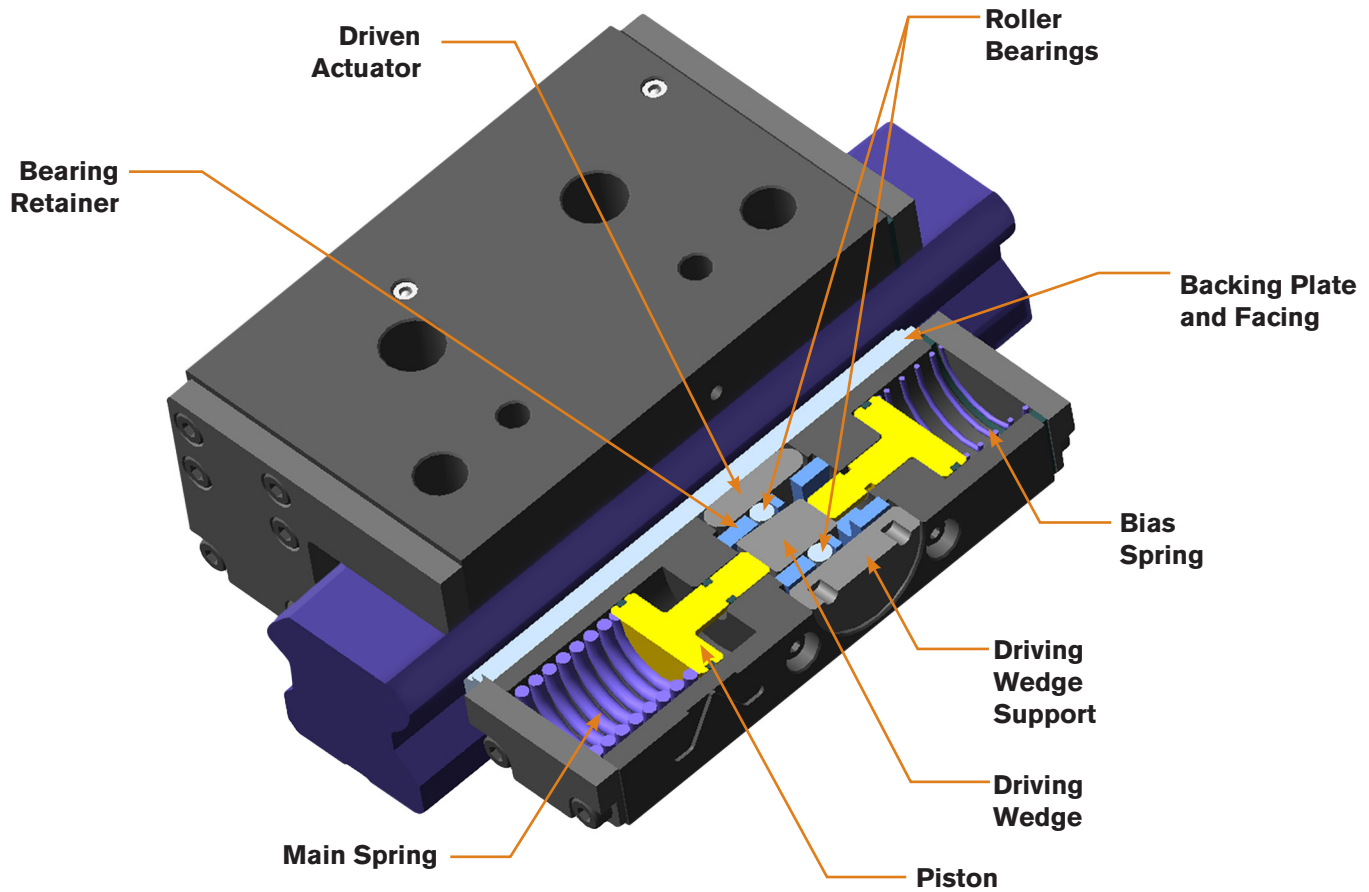

## Rail Brake Product Numbers by Rail Type

Rail/Carriage Manufacturer	Rail Type	RB15	RB20	RB25	RB30	RB35	RB45
THK	HSR	960135 <sup>2</sup>	960145	960130	960102	960101	960193
	SHS	960141	960147	960150	N/A <sup>4</sup>	960163	960190
	SRG	960136	960142	960126	N/A <sup>4</sup>	960164	960192
	SR <sup>1</sup>	960177 <sup>2</sup>	960180	960151	N/A <sup>4</sup>	960176	N/A
STAR	1605	960139	960146	960152	960105	960165	960187
	1607	960139	960146	960152	960105	960165	960187
	1645	960139	960146	960152	960105	960165	960187
	1647	960139	960146	960152	960105	960165	960187
	1805	N/A	N/A	960153	N/A <sup>4</sup>	960166	N/A
	1807	N/A	N/A	960153	N/A <sup>4</sup>	960166	N/A
Hiwin	HGR <sup>1</sup>	960179 <sup>2</sup>	960178	960161	N/A <sup>4</sup>	960174	960181
INA	KUSE	N/A	960148	960154	N/A <sup>4</sup>	960167	960194
	KUVE	N/A	960143	960155	N/A <sup>4</sup>	960168	960195
NSK	LS	960138	960144	960156	N/A <sup>4</sup>	960169	960186
	LH	960131	960125	960157	N/A <sup>4</sup>	960170	960185
Schneeberger	MR	N/A	N/A	960162	N/A <sup>4</sup>	N/A	N/A
IKO	LWH	960132	960127	960158	N/A <sup>4</sup>	960171	960184
	LRX	960134	960129	960160	N/A <sup>4</sup>	960173	960182
	LWE	960133	960128	960159	N/A <sup>4</sup>	960172	960183
SKF	LLRHS..A	960139	960146	960152	960105	960165	N/A
	LLRHS..LA	960139	960146	960153	960105	960165	N/A
	LLRHS..SA	960139	960146	960153	960105	960165	N/A

## Specifications

Model	Holding Force (minimum)	Backlash at Full Brake Force (maximum)	Release Pressure (minimum)	Starting Engagement Time <sup>3</sup>	Mass (average)
RB15	500 N [112 lbs]	Up to 0.10 mm [0.004 in]	5.5 bar [80 psi]	0.049 sec.	0.41 Kg [0.904 lbs]
RB20	800 N [180 lbs]	Up to 0.13 mm [0.005 in]	5.5 bar [80 psi]	0.044 sec.	0.62 Kg [1.367 lbs]
RB25	1000 N [225 lbs]	Up to 0.20 mm [0.008 in]	5.5 bar [80 psi]	0.050 sec.	0.84 Kg [1.86 lbs]
RB30	1300 N [292 lbs]	Up to .020 mm [0.008 in]	5.5 bar [80 psi]	0.070 sec.	1.54 Kg [3.40 lbs]
RB35	1600 N [360 lbs]	Up to 0.20 mm [0.008 in]	5.5 bar [80 psi]	0.070 sec.	2.04 Kg [4.50 lbs]
RB45	2600 N [585 lbs]	Less than 0.20 mm [0.008 in]	5.5 bar [80 psi]	0.080 sec.	3.48 Kg [7.68 lbs]


<sup>1</sup> Rail brake holding forces are 10% less than show above when used with THK, "SR" and Hiwin "HGR" rail types.

<sup>2</sup> RB15 product numbers 960135, 960177 and 960179 have a holding force of 400 N [90 lbs]

<sup>3</sup> Average, full engagement time with up to 2 meters length of 4mm, polyurethane tube, and 1.4 C<sub>v</sub>, 24 volt directional control valve and no quick exhaust.


<sup>4</sup> Contact Nexen for Availability

## Profile Rail Brake, Approximate Dimensions

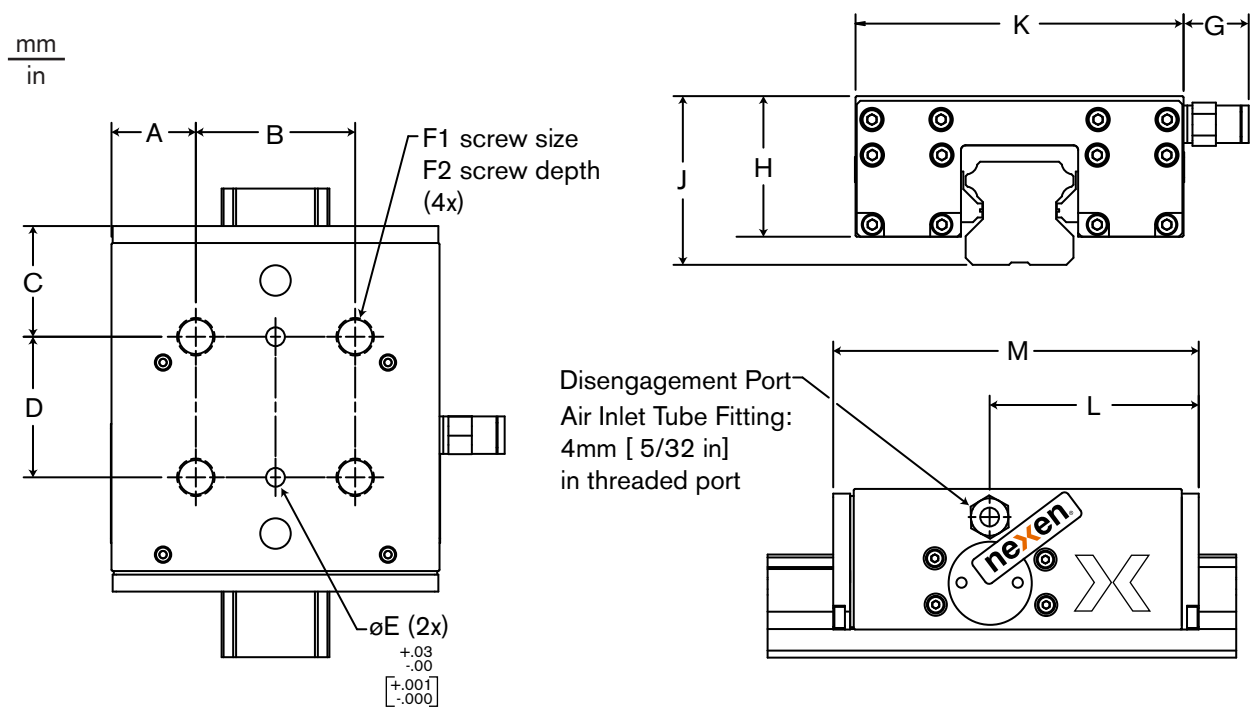

Model	A	B	C	D	øE	F1	F2	G	H	J	K	L	M	Threaded Port
RB15	14.50 [0.571]	26.00 [1.024]	19.12 [0.753]	26.0 [1.024]	3.00 [0.118]	M5 x 0.8-6H	6.2 [0.24]	14.22 [0.560]	20.50 [0.807]	24.00 [0.945]	55.00 [2.165]	50.1 [1.97]	65.00 [2.56]	M3 x 0.5-6H
RB20	16.50 [0.650]	30.00 [1.181]	20.6 [0.81]	30.00 [1.181]	4.00 [0.157]	M6 x 1.0-6H	7.2 [0.29]	14.22 [0.560]	25.50 [1.004]	30.00 [1.181]	63.00 [2.480]	34.6 [1.36]	72.00 [2.83]	M3 x 0.5-6H
RB25	18.00 [0.709]	34.00 [1.339]	23.6 [0.93]	30.00 [1.181]	4.00 [0.157]	M8 x 1.25-6H	9.0 [0.34]	13.9 [0.55]	30.00 [1.181]	36.00 [1.417]	70.00 [2.756]	44.6 [1.76]	78.0 [3.07]	M5 x 0.8-6H
RB30	9.00 [.354]	72.00 [2.835]	24.1 [.95]	52.00 [2.047]	6.00 [.236]	M10 x 1.5-6H	9.0 [.35]	13.9 [.055]	35.00 [1.378]	42.00 [1.654]	90.00 [3.543]	58.6 [2.31]	100.2 [3.945]	M6 x 1.0-6H
RB35	8.75 [0.344]	82.00 [3.228]	19.1 [0.75]	62.00 [2.441]	6.00 [0.236]	M10 x 1.5-6H	9.0 [0.35]	13.9 [0.55]	40.00 [1.575]	48.00 [1.890]	100.00 [3.937]	59.1 [2.33]	101.0 [3.98]	M6 x 1.0-6H
RB45	27.50 [1.083]	65.00 [2.559]	24.6 [0.97]	70.00 [2.756]	6.35 [0.250]	M12 x 1.75-6H	14.0 [0.55]	13.9 [0.55]	50.00 [1.969]	60.00 [2.362]	120.00 [4.724]	68.4 [2.69]	120.0 [4.72]	M6 x 1.0-6H

## Typical Mounting Arrangement

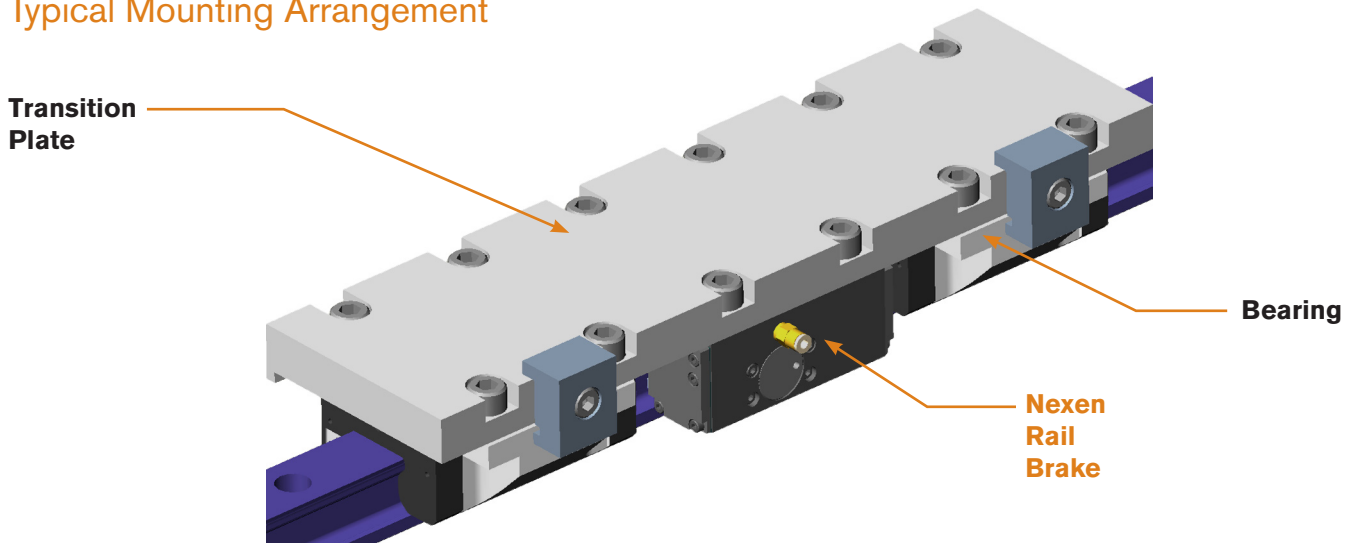

# Rail Brake Sample Calculations for Emergency Stops

## SAMPLE DATA

Brake Model	Brake Force (F)	Brake Engagement Time (t <sub>e</sub> )	Acceleration of Gravity (g)	Mass of Load (m)	Load Velocity (V)
RB25	1000 N	0.050 seconds	9.8 m/s <sup>2</sup>	45.4 kg	0.50 m/s

### HORIZONTAL TRAVEL (X and Y axis)

Dynamic Stopping Time (in seconds)

$$t_s = \frac{m \cdot V}{F}$$

$$t_s = \frac{45.4 \cdot 0.50}{1000} = 0.023 \text{ seconds}$$

Stopping Distance (in meters) at full brake force

$$d_s = \frac{0.5 \cdot m \cdot V^2}{F}$$

$$d_s = \frac{0.5 \cdot 45.4 \cdot 0.50^2}{1000} = 0.006 \text{ meters}$$

Distance of Travel During Brake Engagement

$$d_e = V \cdot t_e$$

$$d_e = 0.5 \cdot 0.050 = 0.025 \text{ meters}$$

Total Travel Distance

$$d_T = d_s + d_e$$

$$d_T = 0.006 + 0.025 = 0.031 \text{ meters or } 31 \text{ mm}$$

In this example, the load will travel 31 mm [1.22 in] from the time the RB25 engages until the system is brought to a complete stop.

### VERTICAL TRAVEL (Z axis)

Dynamic Stopping Time

$$t_s = \frac{(F \cdot t_e) + (m \cdot V)}{(F - m \cdot g)}$$

$$t_s = \frac{(1000 \cdot 0.050) + (45.4 \cdot 0.50)}{(1000 - (45.4 \cdot 9.8))} = 0.131 \text{ seconds}$$

Stopping Distance (d<sub>s</sub>) at full brake force

$$\begin{aligned} \text{Step A} &= 0.5(g - F/m) t_s^2 \\ &= 0.5(9.8 - 1000/45.4)0.131^2 = -.105 \end{aligned}$$

$$\begin{aligned} \text{Step B} &= [F/m(t_e) + V]t_s \\ &= [1000/45.4(0.050) + 0.50]0.131 = 0.210 \end{aligned}$$

$$\begin{aligned} \text{Step C} &= 0.5(F/m)t_e^2 \\ &= 0.5(1000/45.4)0.050^2 = 0.028 \end{aligned}$$

$$\begin{aligned} d_s &= A + B - C \\ &= -.105 + .210 - .028 \\ &= 0.077 \text{ meters or } 77 \text{ mm} \end{aligned}$$

Total Travel Distance

$$d_T = d_s = 0.077 \text{ meters or } 77 \text{ mm}$$

In this example, the load will travel 77 mm [3.03 in] from the time the RB25 engages until the system is brought to a complete stop.

In accordance with Nexen's established policy of constant product improvement, the specifications contained in this document are subject to change without notice. Technical data listed in this document are based on the latest information available at the time of printing and are also subject to change without notice. For current information, please consult [www.nexengroup.com](http://www.nexengroup.com)

# nexen®

Nexen Group, Inc.  
560 Oak Grove Parkway  
Vadnais Heights, MN 55127

800.843.7445  
Fax: 651.286.1099  
[www.nexengroup.com](http://www.nexengroup.com)

Nexen has sales offices throughout the United States, Europe, Japan, and Australia.